



TECHNICAL DATA / FEATURES

- dimensions: $\phi 80 \times 96$, $\phi 84 \times 97$
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: standard
- light distribution angle: $40^\circ \times 22^\circ$
- IP rating: IP66, IP69K
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: AMP Faston 250, Deutsch DT



ADDITIONAL INFORMATION

Universal lamps dedicated for small recesses or in places with limited space for installation.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.


Versions with the bracket can be installed on a vehicle in an upright or upside-down position.

It is possible to install needed connectors on wire (on request).

Useful parts while installing:

- AMP Faston 250 plug 2-pin - cat. No. A.07138
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

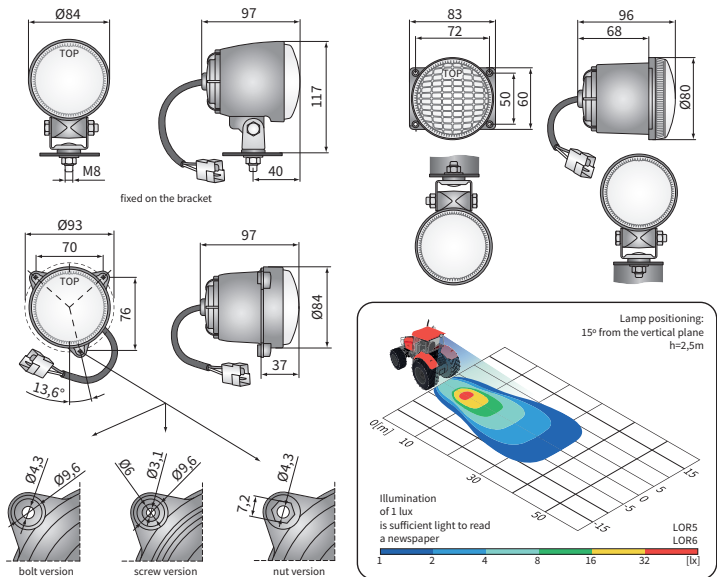

Cat. number	Diameter		Accessories	Mounting method	in recess	installed vertically up	suspended	Bracket	4 bolts	M8	3 bolts	3 screws	3 nuts	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin
	$\phi 80$	$\phi 84$																
LOR5.41331	✓				✓			✓						✓				2
LOR5.41332	✓				✓			✓						✓				2
LOR5.41301	✓				✓			✓						✓				2
LOR5.41302	✓				✓			✓						✓				2
LOR5.41341	✓				✓			✓						✓				2
LOR5.41311	✓				✓			✓						✓				2
LOR5.41321	✓				✓			✓						✓				2
LOR6.41506		✓				✓	✓							✓				2
LOR6.41501		✓				✓	✓							✓				2
LOR6.41502		✓				✓	✓							✓				2
LOR6.41509																		2
LOR6.41510																		2
LOR6.41520																		2
LOR6.41522																		2
LOR6.41540																		2
LOR6.41530																		2
LOR6.41529																		2
LOR6.41528																		2
LOR6.41524																		2
LOR6.41523																		2