



TECHNICAL DATA / FEATURES

- dimensions: $\phi 139/131 \times 75$, $\phi 150/142 \times 77$
- light functions: passing, driving, position
- function markings: C/R, A, HC/R
- traffic: right-hand
- reference mark: 12.5/7.5, 12.5/10
- source of light: H4, R2, W5W
- maximum power: 75/70W, 55/50W, 5W, 60/55W
- nominal voltage: 12V-24V DC, 12V DC
- optics: FF
- IP rating: IP54, IP66
- housing's material: plastic, metal
- lens' material: glass
- built-in connectors: -



ADDITIONAL INFORMATION

Approved to be used with H4 and R2 type bulbs.

Equivalents for Hella:

C - 1A3 996 162-071, D - 1A3 996 162-607, E - 1A3 996 162-381
 F - 1A3 003 370-067, G - 1A3 003 370-041

Dedicated application:

A - tractors:

Deutz- Fahr series: 07, Agrocompact, Agroprima, Agrostar, Agroxtra, DX, DX3 SC, DX3 V/F/S, DX3 VC, DX4, DX6, DX7, Dxab, Dxbs, Hopfen


B - tractors:

John Deere series: 6030 (6230PR, 6330PR, 6430PR, 6530PR, 6630PR, 6830PR, 6930PR), 7030 (7430PR, 7430EP, 7530PR, 7530EP)

J - tractors:

Deutz- Fahr series: 4E, 5, 5C, 5D Keyline, 5D TTV, 5DF TTV, 5DF TTV Activesteer, 5DS TTV, 5DV TTV, 5G, 5 TTV, 6 Agrottron;
 Lamborghini series: Mach, Mach T4i VRT, Mach VRT, Nitro T4i, Nitro R T4i, Nitro T4i VRT, R6 T4i, R6 T4i VRT, R6/Spark T4i VRT
 Same series: Argon 80, Audax, Dorado CVT, Dorado Natural, Explorer, Fortis, Frutteto CVT
 Hürlimann series: XA Spirit, XA V-Drive, XB, XE, XF, XF V-Drive, XL, XL K, XL K RVshift, XL K V-Drive, XL V-Drive, XLK V-Drive, XM.K, XS V-Drive, XV V-Drive


DIMENSIONS

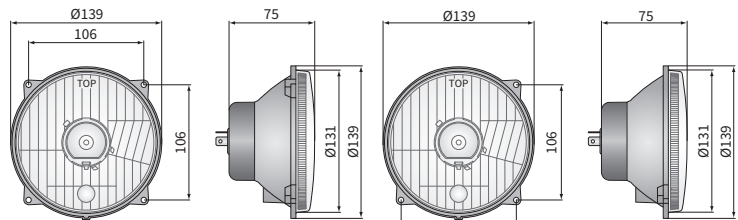


PES3.42210 PES3.42211

PES3.42222 PES3.42223

PES3.42225

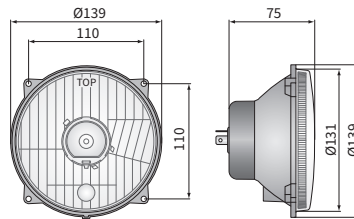


PES3.42232 PES3.42233

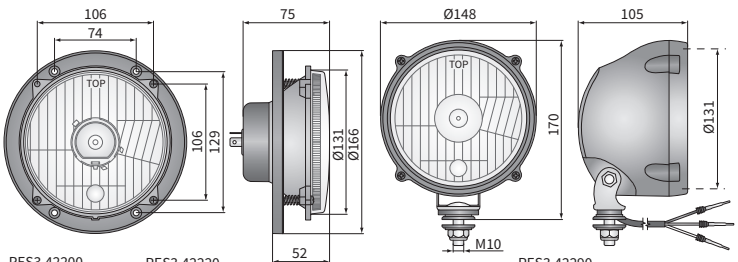

PES3.42200 PES3.42201

PES3.42220 PES3.42221

PES3.42280 PES3.42281

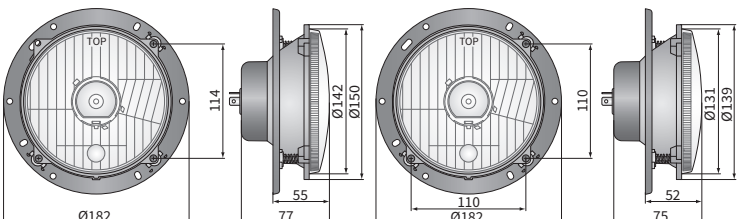

PES2.42060

PES2.42063 PES2.42064

PES3.42280 PES3.42281

Cat. number	Homologation code	Light functions			Dimensions	Accessories	Equivalent	Application	dedicated
		passing	driving	position					
PES3.42201	051	✓	✓	✓	$\phi 139/131 \times 75$				
PES3.42200	051	✓	✓	✓	$\phi 150/142 \times 77$	bulb H4 12V			
PES3.42211	051	✓	✓	✓		bulb W5W			
PES3.42210	051	✓	✓	✓		housing			
PES3.42221	051	✓	✓	✓		mounting plate			
PES3.42220	051	✓	✓	✓		bulb gasket			
PES3.42222	051	✓	✓	✓		bulb holder IP66			
PES3.42223	051	✓	✓	✓		cable 0.37 m			
PES3.42225	051	✓	✓	✓		cable 0.47 m			
PES3.42225	051	✓	✓	✓		TE 925075 connector			
PES3.42225	051	✓	✓	✓					
PES3.42280	051	✓	✓	✓				C	
PES3.42281	051	✓	✓	✓				C	
PES3.42232	051	✓	✓	✓				E	
PES3.42233	051	✓	✓	✓				F	
PES3.42280	051	✓	✓	✓				G	
PES3.42281	051	✓	✓	✓				A	
PES3.42290	051	✓	✓	✓				A	
PES3.42291	051	✓	✓	✓				A	
PES3.42292	051	✓	✓	✓				D	
PES3.42292	051	✓	✓	✓				B	
PES2.42063	050	✓	✓	✓				J	
PES2.42060	050	✓	✓	✓					
PES2.42064	050	✓	✓	✓					