



TECHNICAL DATA / FEATURES

- dimensions: φ138/128x81
- light functions: passing, driving, position
- function markings: C/R, A
- traffic: right-hand
- reference mark: 10
- source of light: H4, T4W
- maximum power: 60/55W, 4W
- nominal voltage: 12V DC
- optics: standard
- IP rating: IP54
- housing's material: metal
- lens' material: glass
- built-in connectors: -



ADDITIONAL INFORMATION

Particularly recommended for tractors and slow-moving vehicles.

To be mounted in factory designed locations or in the front bumper recesses.

Useful parts while installing:

- main bulb gasket - cat. No. A.05820
- position light bulb holder - cat. No. A.05921

Dedicated application:


A - tractors:

- Massey Ferguson: 5425, 5435, 5445, 5455, 5460, 5465, 5470, 5475, 5480, 6445, 6455, 6460, 6465, 6470, 6475, 6480, 6485, 6490, 6495, 6497, 6499, 7465, 7475, 7480, 7485, 7490, 7495, 7497, 7499, 8450, 8460, 8470, 8480


B - tractors:

- John Deere: 1550, 1750, 1750V, 1850, 1850N, 1950, 1950N, 2250, 2250F, 2450, 2450F, 2650, 2650N, 2850, 3050, 3350, 3650, 4050, 4055, 4050E, 4250, 4350, 4450, 4650, 4850, 4255, 4455, 4555, 4755, 4955

DIMENSIONS

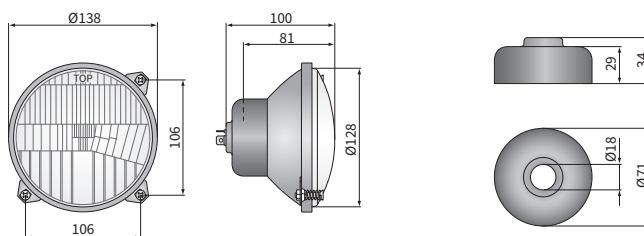

A.05820



A.05921

Cat. number	Massey Ferguson No.	John Deere No.	Homologation code	Light functions			Accessories	Side	Application	Packaging / pc	carton box
				passing	driving	position					
RGC2.52870	3788220M91		095	✓	✓				A	1	
RGC2.52871	3788220M91		095	✓	✓		✓		A	1	
RGC2.52875		AL56091	095	✓	✓	✓	✓		B	1	