



**TECHNICAL DATA / FEATURES**

- dimensions: φ150/143x89
- light functions: passing, driving, position
- function markings: C/R, A
- traffic: right-hand
- reference mark: 7.5
- source of light: R2, T4W
- maximum power: 55/50W, 4W
- nominal voltage: 12V-24V DC
- optics: standard
- IP rating: IP54
- housing's material: metal
- lens' material: glass
- built-in connectors: -



**ADDITIONAL INFORMATION**


Particularly recommended for tractors and slow-moving vehicles.

To be mounted in factory designed locations or in the front bumper recesses.


Useful parts while installing:

- main bulb gasket - cat. No. A.05820
- position light bulb holder - cat. No. A.05921
- main bulb mounting block - cat. No. A.07128

**DIMENSIONS**

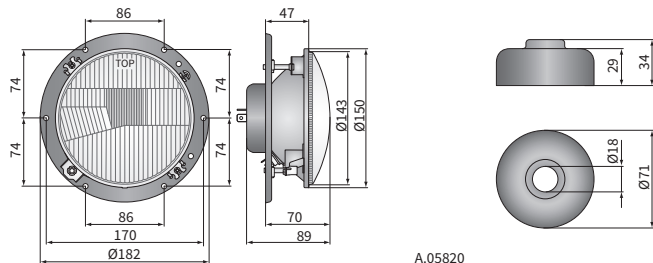

A.05820



A.05921

Cat. number	Homologation code	Light functions			Type	Accessories	bulb R2 12V	bulb T4W	mounting plate	bulb gasket	Side	right	left	Packaging / pc	carton box
		passing	driving	position											
<b>RE.41400</b>	032	✓	✓	✓	✓			✓	✓		✓	✓		1	
<b>RE.41401</b>	032	✓	✓	✓	✓			✓	✓		✓	✓		1	